

PS4000 C

Solar-operated Submersible Pump System

Characteristics

- flow rate up to 70 m³/h
- lift up to 170 m
- maintenance-free
- excellent efficiency thanks to modern brushless DC motor technology

Application

- drinking water supply
- livestock watering
- pond management
- irrigation
- etc.

Components

Controller PS4000

- controlling of the pump system and monitoring of the operating states
- mounted at surface (no electronic parts submerged)
- two control inputs for well probe (dry running protection), float or pressure switches, remote control etc.
- automatic reset 20 minutes after well probe turns pump off
- protected against reverse polarity, overload and high temperature
- speed control, max. pump speed adjustable to reduce flow rate to c. 30 %
- solar operation: integrated MPPT (Maximum Power Point Tracking), Voc = 375 V DC, Vmp > 230 V DC
- battery operation: low voltage disconnect and restart after battery has recovered
- max. efficiency 92% (motor + controller)
- enclosure: IP 54 (sealed, weatherproof)
- ambient temperature: -30 to +40° C / -20 to +115° F

Motor ECDRIVE 4000C

- 2-pole, synchronous brushless DC motor
- high life expectancy, electronically commutated, sensorless
- voltage: max. 240 V EC (electronically commutated)
- power: 3.5 kW / 4.6 HP, n_{max} = 3,300 RPM

- no electronics inside motor
- water filled
- IP68, pressure balanced, max. submersion 250 m
- water lubricated dynamic slide bearings, material: carbon/ceramic
- raw earth magnets, sealed in stainless steel and encapsulated in synthetic resin
- unlimited number of starts/stops per hour
- wetted material: stainless steel (AISI 316), POM, rubber, cable drinking water approved
- max. water temperature: 40° C / 105° F

Pump End (PE)

- centrifugal multistage direct-coupled pump end
- non-return valve
- material: stainless steel (AISI 304), rubber
- dry running protection (optional)
- max. sand content: 50 g/m³, a higher content will wear the pump and reduce its life span considerably
- max. salt content: 300–500 ppm at max. 30° C / 85° F, higher salt contents require lower water temperatures
- pH value: 6-9
- high life expectancy

Motor and controller can only operate as unit. The motor cannot be operated without controller or with a different controller.




picture may differ from actual product

Performance

| Pump Head | Lift | | Flow Rate | |
|-----------|----------|----------|-----------|---------------|
| | [m] | [ft] | [m³/h] | [US-Gal./h] |
| C-SJ3-32 | 130–170 | 430–560 | 3.3–3.8 | 800–1,000 |
| C-SJ5-25 | 70–130 | 260–430 | 4.3–6.6 | 1,150–1,720 |
| C-SJ8-15 | 30–80 | 100–260 | 6.9–12.2 | 1,700–3,200 |
| C-SJ17-4 | 15–50 | 50–165 | 14.0–24.5 | 3,700–6,500 |
| C-SJ30-2 | 12–22 | 40–70 | 33–44 | 8,500–11,000 |
| C-SJ42-1 | up to 12 | up to 40 | 44–70 | 11,000–18,500 |

Daily Flow Rate | 8.5 peak flow hours per day, PV generator* 5 kWp, Vmp > 230VDC, tracked, 6 kWh/m²/day

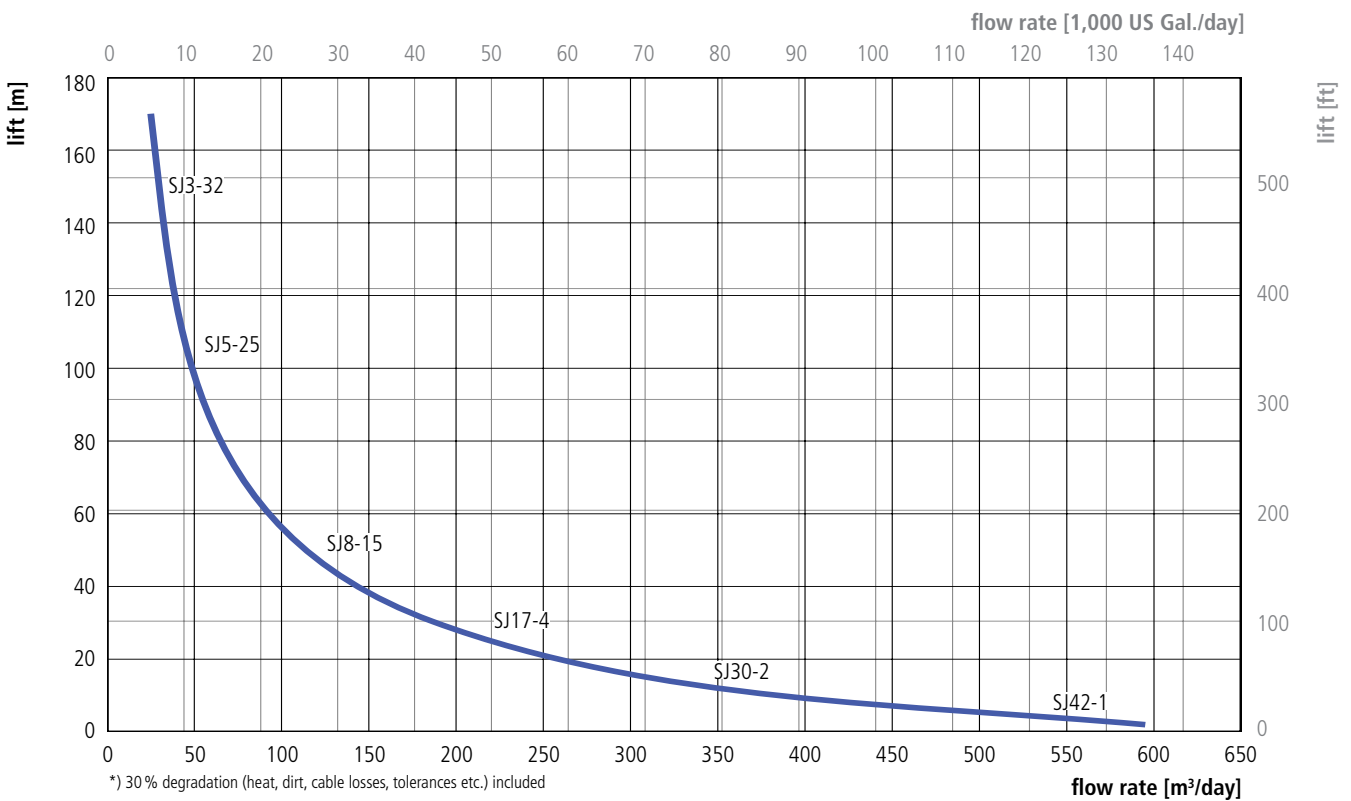

Dimensions

| Pump | Dimensions | | | | | | Minimum internal borehole diameter | Weight [kg] |
|---------------|------------|------|------|------|------------------|------|------------------------------------|-------------|
| | A | B | C | D | E _{max} | BSP | | |
| | [mm] | [mm] | [mm] | [mm] | [mm] | [in] | [in / mm] | |
| SJ3-32 | 1,088 | 245 | 843 | 96 | 98 | 1 ¼ | 4 / 104 | 19.5 |
| SJ5-25 | 941 | 245 | 696 | 96 | 98 | 1 ½ | 4 / 104 | 18.0 |
| SJ8-15 | 1,118 | 245 | 873 | 96 | 98 | 2 | 4 / 104 | 20.5 |
| SJ17-4 | 754 | 245 | 509 | 96 | 131 | 2 ½ | 6 / 150 | 20.5 |
| SJ30-2 | 705 | 245 | 460 | 96 | 131 | 3 | 6 / 150 | 19.5 |
| SJ42-1 | 625 | 245 | 380 | 96 | 147 | 3 | 6 / 150 | 18.0 |

| Controller | | | | |
|-------------------|-----|-----|-----|-----|
| Pump | A | B | C | D |
| PS4000 | 595 | 178 | 165 | 150 |

